



## DOLLY – J.L. FISHER

# MODEL 10


Recognized as the industry standard, the Model 10 Dolly is manufactured from the highest quality materials and components to meet the demanding needs of the motion picture, television and video industries. This stable, reliable Dolly offers operators versatile features and a wide variety of accessories.

- Lightweight and small size
- Steering Wheels for three movements: tracking shot, conventional or rotation on axis.
- Turning radius reduced.
- Mechanical compensation of the steering wheel.
- Self-control system on track
- Self-lubricating hydraulic arm.
- Two minute for recharged hydraulic arm.
- Self-centering steering knob
- Hydraulic arm controls with safety lock
- Manual hydraulic pump.
- Lift range indicator.
- Sliding and padded seats.
- Pneumatic Wheels.
- Brakes on the four Wheels activated by a single lever.
- Mitchell mount on Standard Level Head [ SLT ].
- Battery compartment.
- Battery connections for camera cables.
- Six seats are possible.
- Removable thrust struts with hooks.
- 227 kg of flow on the hydraulic arm.
- Seven lifts for system charge.



**DATASHEET**

Maximum lifting with Standard Level Head [ SLE ]	169 cm
Minimum lifting with Standard Level Head [ SLE ]	35 cm
Minimum lifting with Low Level Head [ LHE ]	8 cm
Vertical lifting	120 cm
Lifting capacity	220 kg
Length	140 cm
Width	67 cm
Height	100 cm
Height close	63 cm
Minimum radius steering "Round SteelRing"	56 cm
Minimum radius steering "Conventional SteelRing"	11 cm
Maximum column payload	190 kg
Maximum dolly payload	544 kg
Lifting for each charge	7

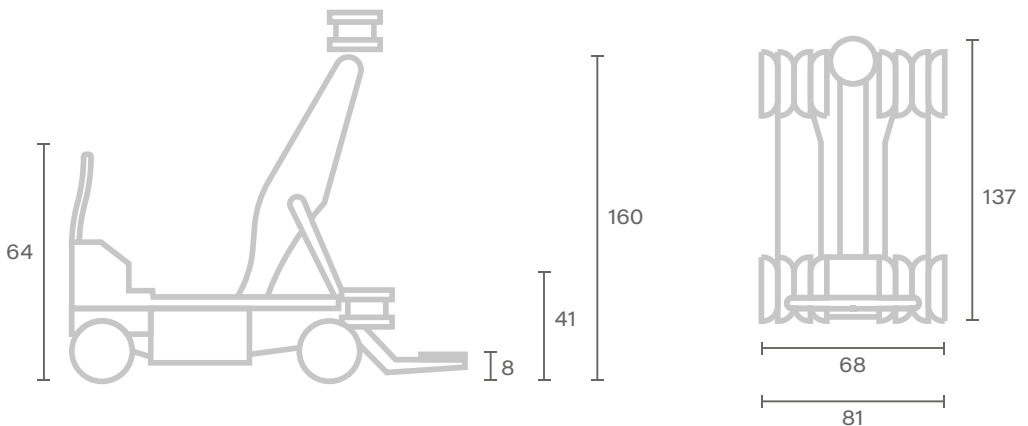

Unit of measure - centimetres [ cm ]